




**ALL-TAG SECURITY
AMERICAS**

512 NW 77th St
Boca Raton, FL 33487
USA

TEL: 1 866 998 2299
FAX: 1 561 998 4897
E-mail address : info@all-tag.com
Website : <http://www.all-tag.com>

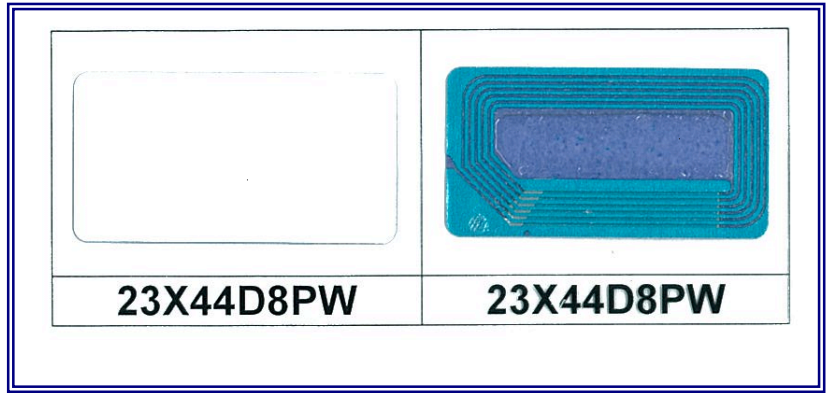

23x44 LABEL SPECIFICATION SHEET

LABEL REFERENCE	23x44	
DEACTIVATABLE	Yes	
LABEL FREQUENCY	8.2 Mhz ± 5 %	
Q FACTOR	55	
COVER OF LABEL	Plain White, Barcode, Thermal, Black	
LABEL LENGTH	23,0 ^{+0,5} ₊₀ mm	0,905 ^{+0,020} ₊₀ inches
LABEL WIDTH	43.8 mm / 1,724 inches	
LABEL + SUPPORT PAPER WIDTH	48,5 ^{+0,5} _{-0,5} mm	1,91 ^{+0,02} _{-0,02} inches
LABEL THICKNESS	0.45 mm / 0,018 inches	
SPACE BETWEEN 2 LABELS	1,9 ^{+0,2} _{-0,2} mm	0,075 ^{+0,008} _{-0,008} inches
EXTERNAL DIAMETER OF ROLL OF 2.000 GOOD TAGS	195 mm / 7.68 inches	
MAXIMUM EXTERNAL DIAMETER OF ROLL OF 2.000	200 mm / 7.87 inches	
INTERNAL DIAMETER OF CORE	77 mm / 3.03 inches	
ADHESIVE	Permanent Base Caoutchouc Solvant	
NUMBER OF BAD TAGS PER ROLL	Indicated on the label's core	
LABEL WINDING	External Winding	
LABEL LIFE	2 Years	
LABEL STORAGE	In a Area with around 50 % Humidity, Light Sheltered and UV	